


# Boston

## SX50 5 1/4-inch (130mm) Component Speakers

Specifications:	SX50
Nominal Size	5 1/4" (130mm)
RMS Power Handling	65w
Peak Power Handling	200w
Frequency Response (±3dB)	58-20kHz
Impedance	4Ω
Sensitivity (1w/1M)	90dB

#	Description	Quantity
1	Type S2 3/4" Tweeter	2
2	SX50 Crossover	2
3	SX50 Woofer	2
4	SX50 Woofer Grille	2
5	Flush-Angle Tweeter Mount	2
6	Surface-Angle Tweeter Mount	2
7	SX50 Crossover Cover	2
8	Hex Head Screw	8
9	Spring Clip	8
10	Terminated Woofer Wire	2
11	Terminated Tweeter Wire	2
12	Spring Clip-Front	2
13	Spring Clip-Rear	2
14	M4x10mm (3/8")	2
15	M3x12mm (1/2")	2
16	M4x20mm (3/4")	8
17	#6 x 3/8" Silver Socket Head Screw	4
18	Woofer Gasket	2
not shown	16/18AWG. Connector Barrel	8
not shown	Hex Key	1


### Woofer Dimensions

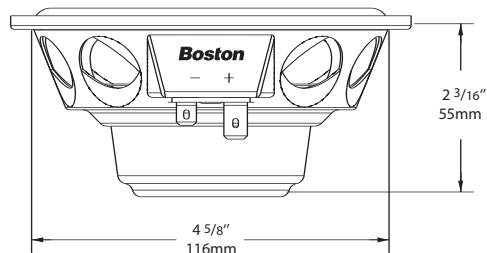



Boston Acoustics, Inc. 300 Jubilee Drive Peabody, Massachusetts 01960 U.S.A. [bostonacoustics.com](http://bostonacoustics.com)  
© 2005 Boston Acoustics, Inc. All rights reserved. Boston, Boston Acoustics, and the Boston Acoustics logo are registered trademarks of Boston Acoustics, Inc.

042-002333-1



### Crossover Dimensions

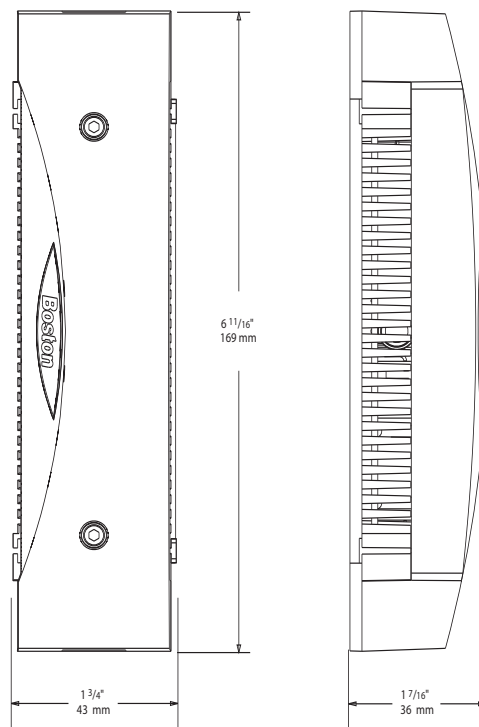

### Surface-Angle Tweeter Mount Dimensions



### Flush-Angle Tweeter Mount Dimensions




\* Depth Without Spring Clip  
\*\* Depth With Spring Clip




# Boston

## SX50 5 1/4-inch (130mm) Component Speakers


### Surface-Angle Mount

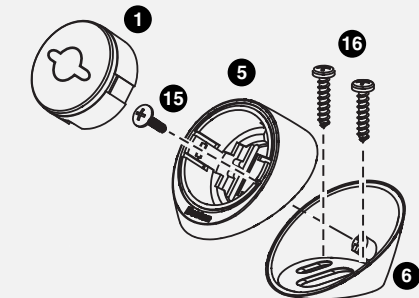


### Flush-Angle Mount

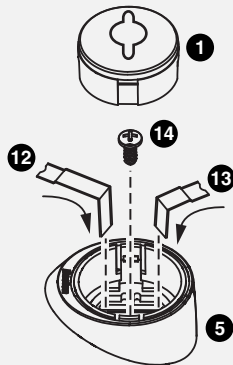


### Tweeter Level Adjustment

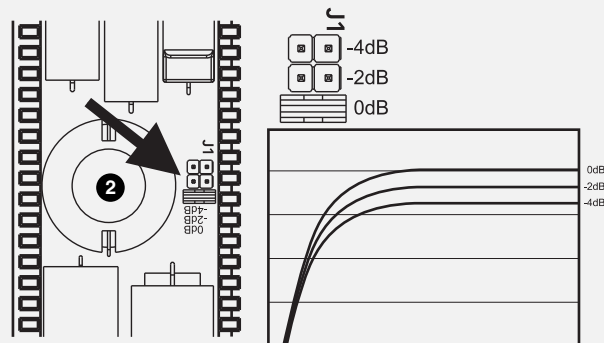


### System Wiring

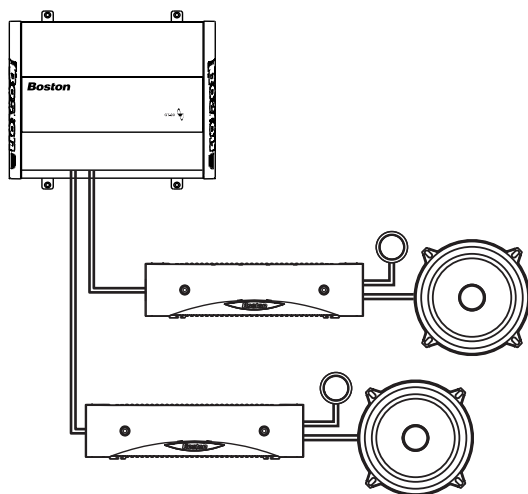

### Grille Installation

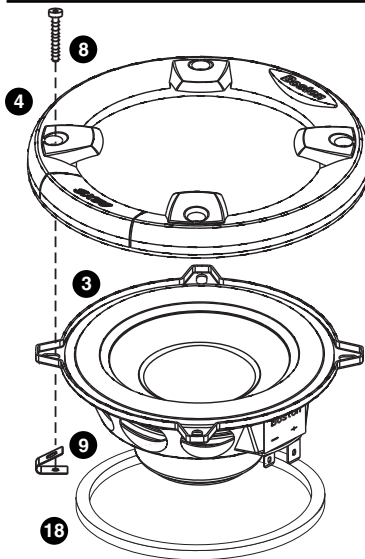

### SX50 Woofer Wiring



### Connecting Crossover Cases

